

TEMPUS LED Weatherproof

Tempus LED weatherproof is a reliable IP66 at 1265mm long batten built for installation in most exterior applications and including tunnels and egress pathways. The weatherproof batten is also available in 655mm length depending on installation requirements.



FEATURES AND BENEFITS

- High quality LED 4000K
- Clear Polycarbonate Diffuser
- Grey Polycarbonate Body
- Option: Class II
- Option: Emergency and/or DALI Maintained
- Option: 38W in 1265mm or 655mm length body





PRODUCT CODE	LENGTH	WIDTH	HEIGHT
TEMU57L4K66	1265	152	102

Tempus LED Weatherproof. Dimensions in MM

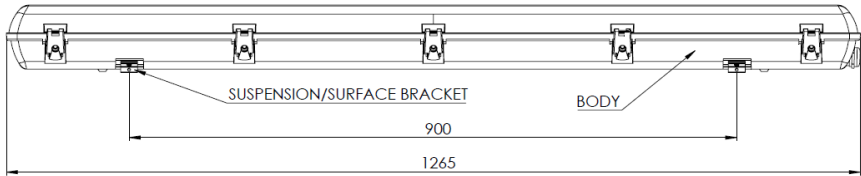


PRODUCT CODE	LENGTH	WIDTH	HEIGHT
TEMU38L4K66	655	152	102

Tempus LED Weatherproof. Dimensions in MM

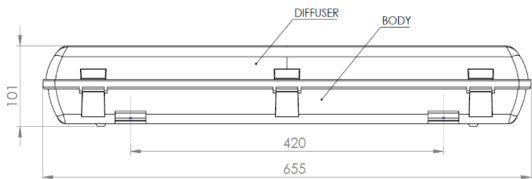

OPTIONAL ACCESSORIES

- Suspended/Surface mount brackets (standard)
- M20 Plastic Cable Glands OR
- M20 Nickel plated cable glands

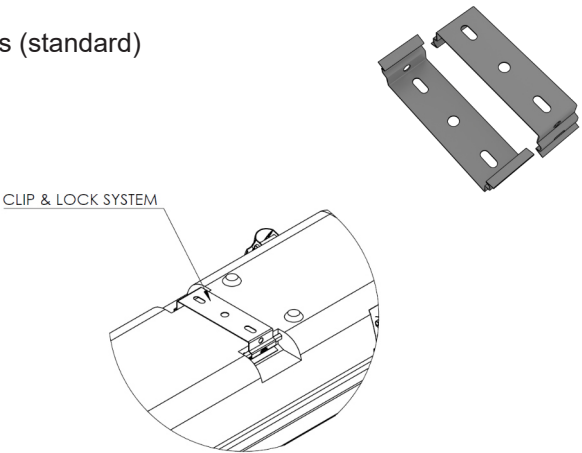

- Fly lead multi-core cables
- Weidmuller HDC Connectors

Tempus LED Weatherproof

Family Name	Tempus Weatherproof
Product Code	TEMU57L4K66(1265mm body) / TEMU38L4K66 (655mm body)
Body Colour	Grey
Power Rating	57 W (standard) / 38 W (compatible with 655mm body)
Power Supply	230 V AC
LED Chip	Samsung
CCT	4000 K
CRI	>80
Ambient Temperature	Ta 40°C
IK Rating	IK 08
IP Rating	IP 66
LED Driver	Tridonic
Fitting Weight	5.6 kg
Installation	Suspended/Surface mount
Applications	Roads & Rail Tunnels Underpasses
Standards	AS/NZ 60598 General Requirement and Tests
Photometric Data	Available by Request



LED light source inside. We do not recommend service or maintenance in situ or on site. To ensure ongoing integrity and functionality LED luminaires shall be serviced or maintained by a competent person in a clean workshop environment free from dust, dirt and moisture.

SPECIFICATIONS MAY BE SUBJECT TO CHANGE

TEMPUS LED Weatherproof

Tempus LED weatherproof is a reliable IP66 at 1265mm long batten built for installation in most exterior applications and including tunnels and egress pathways. The weatherproof batten is also available in 655mm length depending on installation requirements.

METHODOLOGY

Product Code Generator

Product	Type	Wattage	Source	CCT	IP	Control	Emergency	Cable
TEM	U							

Selection

TEMPUS

-STANDARD
U-Ultra
N-Narrow
R-Round

30-30W
38-38W
40-40W
57-57W

L-LED

4K-4000K
GR-Green
OR-Orange

65-IP65
66-IP66

-None
D-DALI VS/TRI

-None
M-Maintained

X1 - Fly lead

Recommended

TEMU57L
TEMN40L

- Notes
- It is recommended to use TEMU series for the best performance in efficiency and durability.
 - TEMN and TEMR series is ideal for temporary lighting as a cost-saving solution.

CONTACT US FOR CONFIRMATION AND TAILORING TO YOUR PROJECT NEEDS